


Brush Kit Installation Instructions



Lift tab installed

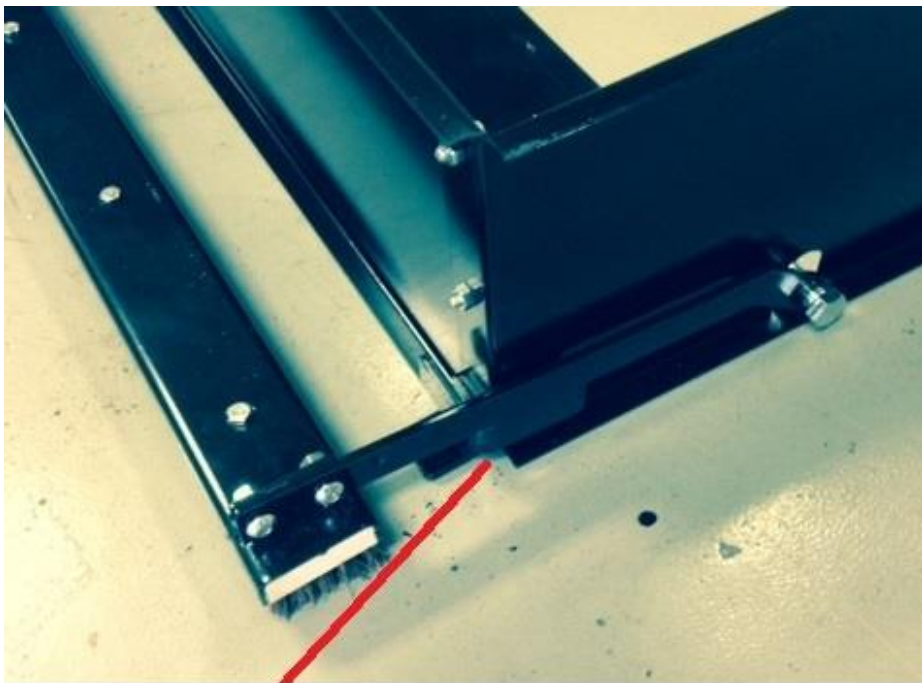

Lift tab goes here and is held on with 5/16 flange nut provided, one must tighten via the bolt and not the flange nut